COMBOLIGHT® GALLERIA Series • CGWA

TWO (2) Light Wall Mount Hinge Arm Fixture
Horizontal Grid Configuration "E" • Lamp Groups 1, 2, & 3
Low Voltage, Line Voltage or Metal Halide for Remote Transformer/Ballast

Catalog #

Type

Project

DESCRIPTION:
A wall mounted fixture with an adjustable hinge arm.

CONSTRUCTION:
All aluminum construction. Grid is made of .75" square aluminum tubing with .062" wall thickness. Weight base adds stability to fixture.

LAMP ASSEMBLY:
Two lamps mounted in adjustable double gimbal lamp holders in a horizontal configuration. Dual axis 90º x 90º locking adjustability. Hinge Arm adjusts 90º vertically.

ELECTRICAL:
Low voltage and metal halide models are wired for use with remote transformers or ballasts. Custom configurations are available for integral transformers or ballasts - consult RSA factory for details. Low voltage and Line Voltage models are dimmable.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.

Label: UL, CSA and New York Calendar

This sheet represents a standard configuration. Custom configurations are available with Galleria fixtures. Consult RSA for details.

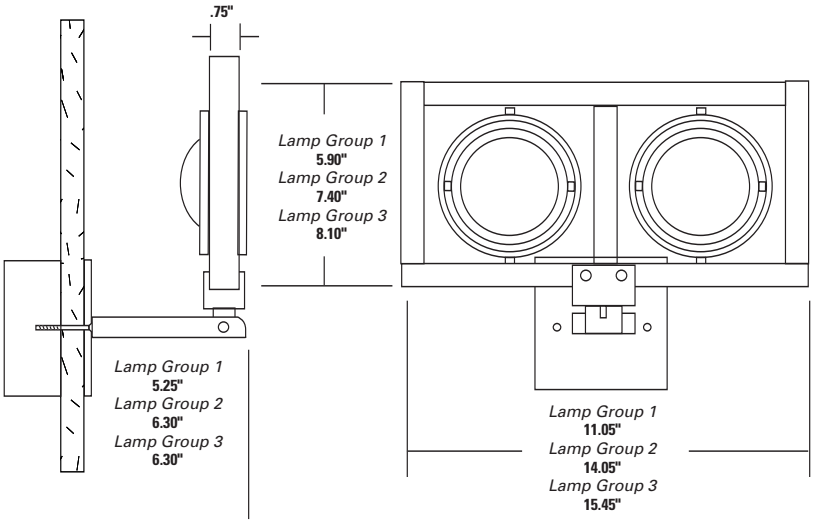



Standard lamp back cover for AR111 models hides lamp terminals and connections.



Adjustable double gimbal lamp holder accepts up to two optical accessories

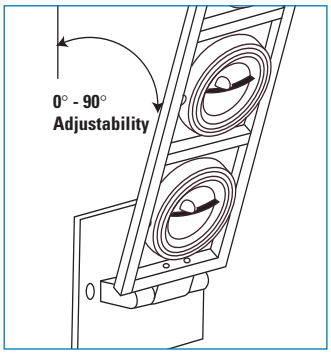

GRID CONFIGURATION "E"

This sheet is for Grid Configuration "E". To see other grid configurations, consult other ComboLight Galleria Series spec sheets.

IMPORTANT: USING THIS SPEC SHEET

This fixture is dimensioned according to lamp type. Please select lamp from either Lamp Group 1, 2 or 3 - and then refer to the appropriate dimensions of fixture as shown above.

Cat. # / Description	Lamp Type		Grid Configuration	Finish
CGWA - Wall Mount Hinge Arm Fixture	**Lamp Group 1**	**11** - MR16 12V 50W	**E** - Two Light Horizontal	**BK** - Black
		12 - MR16 12V 75W		**WH** - White
		13 - AR70 12V 20W		**S** - Silver
		14 - AR70 12V 50W		**PC** - Polished Chrome
		15 - PAR16 120V		**PT** - Custom
		16 - PAR20 120V		
	Lamp Group 2	**21** - PAR20MH 39W		
		22 - PAR30 120V		
		23 - PAR30MH 39W		
		24 - PAR30MH 70W		
		25 - PAR36 12V 50W		
		26 - AR111 12V 35W		
		27 - AR111 12V 50W		
		28 - AR111 12V 75W		
		29 - AR111 12V 100W		
	Lamp Group 3	**31** - PAR38 120V		
		32 - PAR38MH 70W		
		33 - PAR38MH 100W		

SPECIFY - **CGWA** ____ **E** ____

Optional Accessories - Details on Other Side

Baffle	Snoots	Louvers	Lenses